

FIG. 1

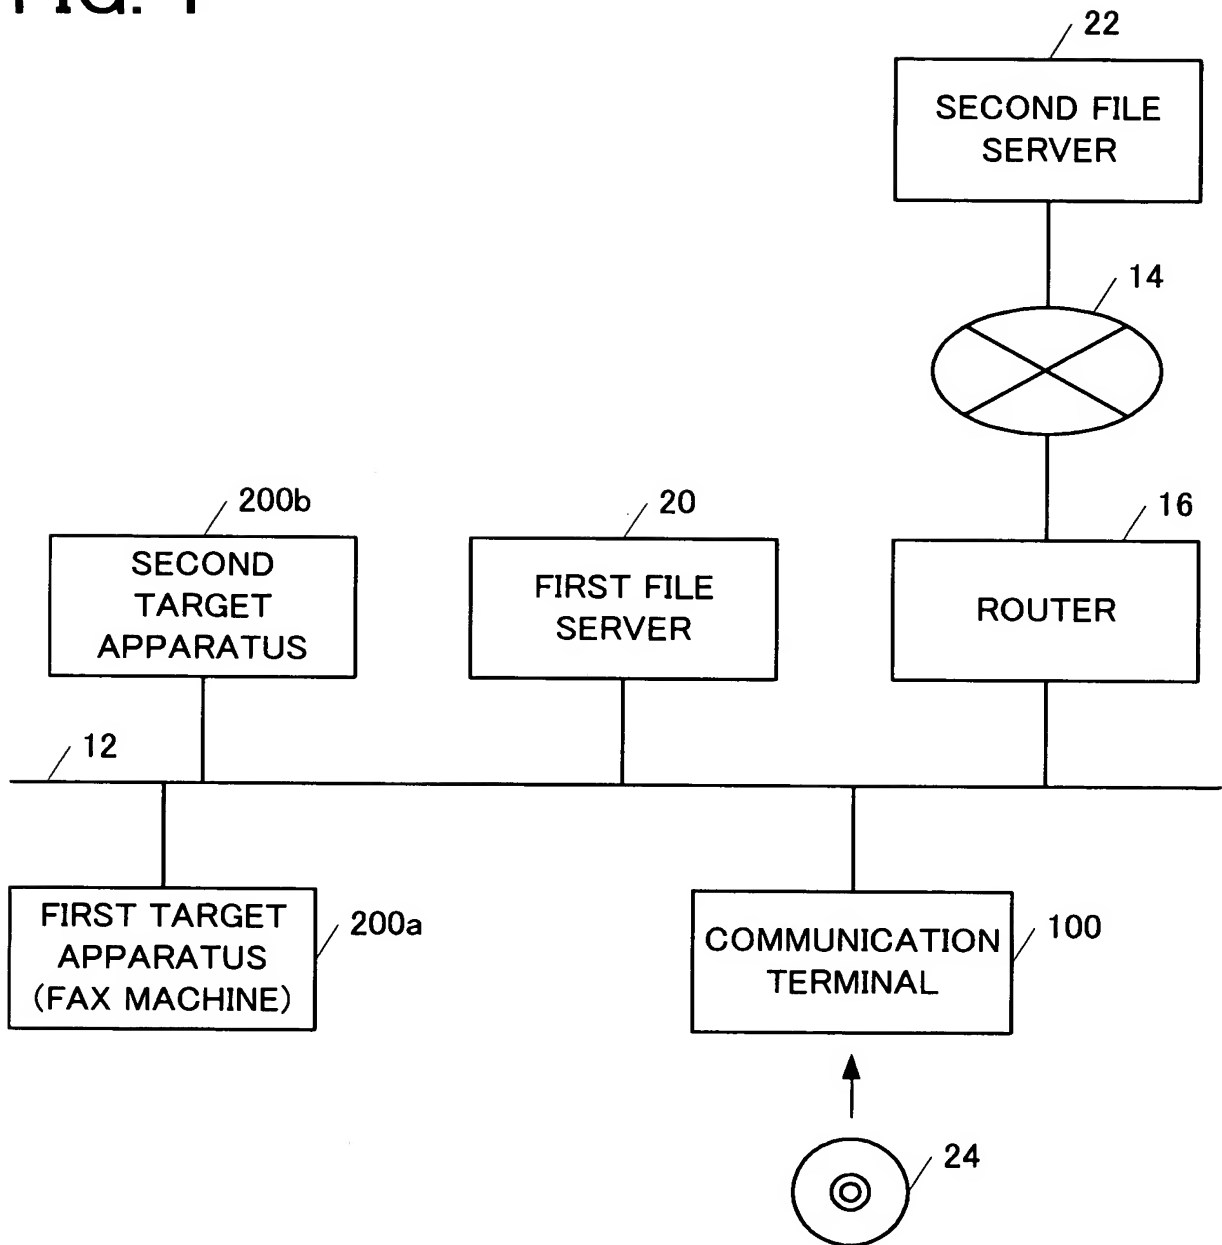


FIG. 2

50

■ THIS IS HELP FOR NETWORK ENVIRONMENT CONFIGURATION FORM.

■ IT IS NECESSARY TO ALWAYS ENTER FOLLOWING ITEMS.

- IP ADDRESS OF THIS DEVICE
- SUBNET MASK

■ FOR EACH CONFIGURATION ITEM

- IP ADDRESS

IP ADDRESS:  
FAX MACHINE...ON NETWORK } 76  
 78

54 { ENTER IP ADDRESS TO BE SET FOR THIS DEVICE.  
WHEN INTRODUCING THIS DEVICE, PLEASE CHANGE IP ADDRESS ACCORDING  
TO ENVIRONMENT.

IP ADDRESS  56

- SUBNET MASK  52

ENTER SUBNET MASK TO BE SET FOR THIS DEVICE.  
PLEASE SET SUBNET MASK ACCORDING TO ENVIRONMENT

SUBNET MASK  56

- GATEWAY ADDRESS  52

IF NECESSARY, PLEASE ENTER GATEWAY ADDRESS.  
TWO GATEWAYS CAN BE SET AT MAXIMUM.

GATEWAY ADDRESS 1  56  
GATEWAY ADDRESS 2  56

- DNS SERVER ADDRESS  52

IF NECESSARY, PLEASE ENTER DNS SERVER ADDRESS.  
TWO DNS SERVERS CAN BE SET AT MAXIMUM.

DNS SERVER ADDRESS 1  56  
DNS SERVER ADDRESS 2  56

MAIL ADDRESS :  58a } 58  
URL :  58b

60

64

IP ADDRESS	192. 168. 0. 100
SUBNET MASK	255. 255. 255. 0
GATEWAY ADDRESS 1	192. 168. 0. 1
GATEWAY ADDRESS 2	192. 168. 0. 2
DNS SERVER ADDRESS 1	61. XXX. XXX. 102
DNS SERVER ADDRESS 2	61. XXX. XXX. 103

62

TRANSMISSION METHOD: MAIL - 66  
DESTINATION: ABC@abc.co.jp - 68  
 70  72

FIG. 3

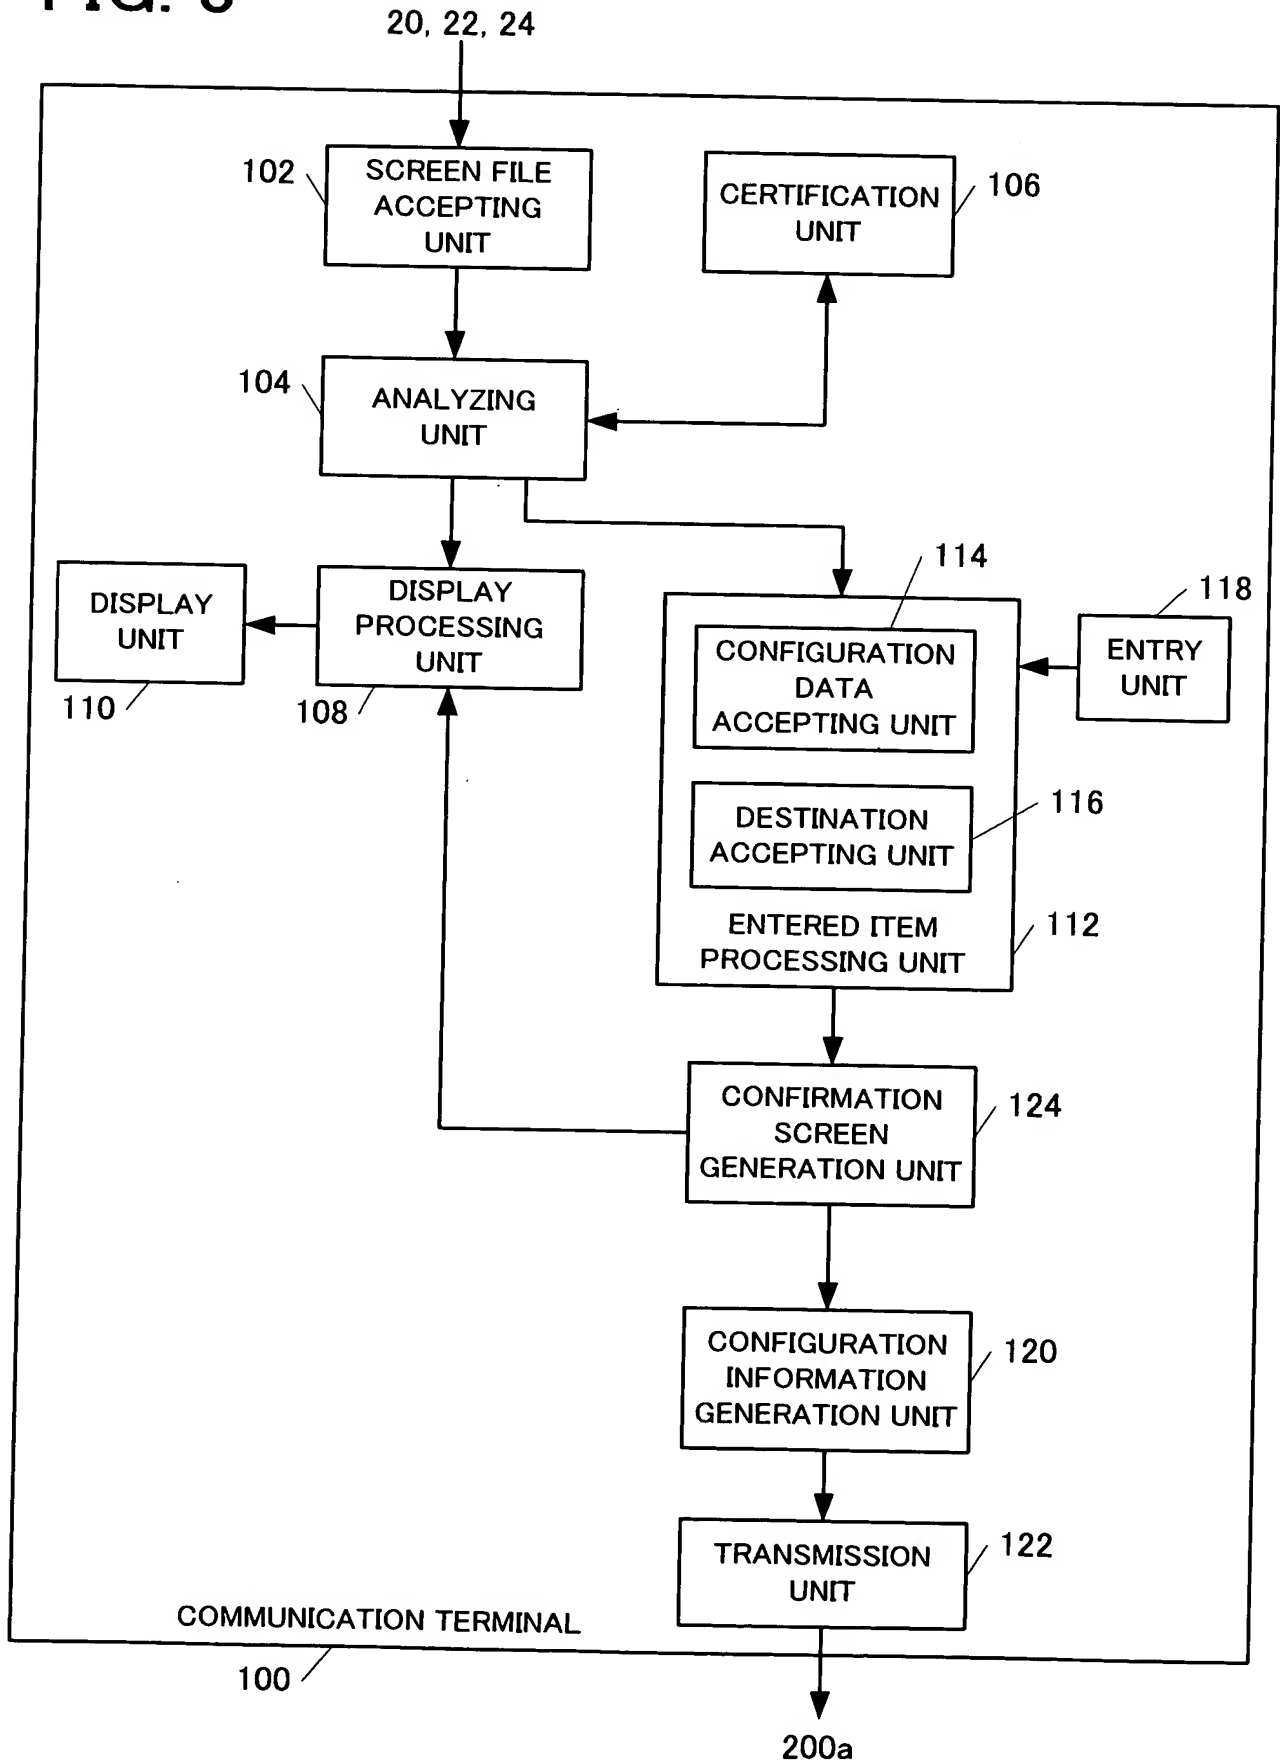


FIG. 4

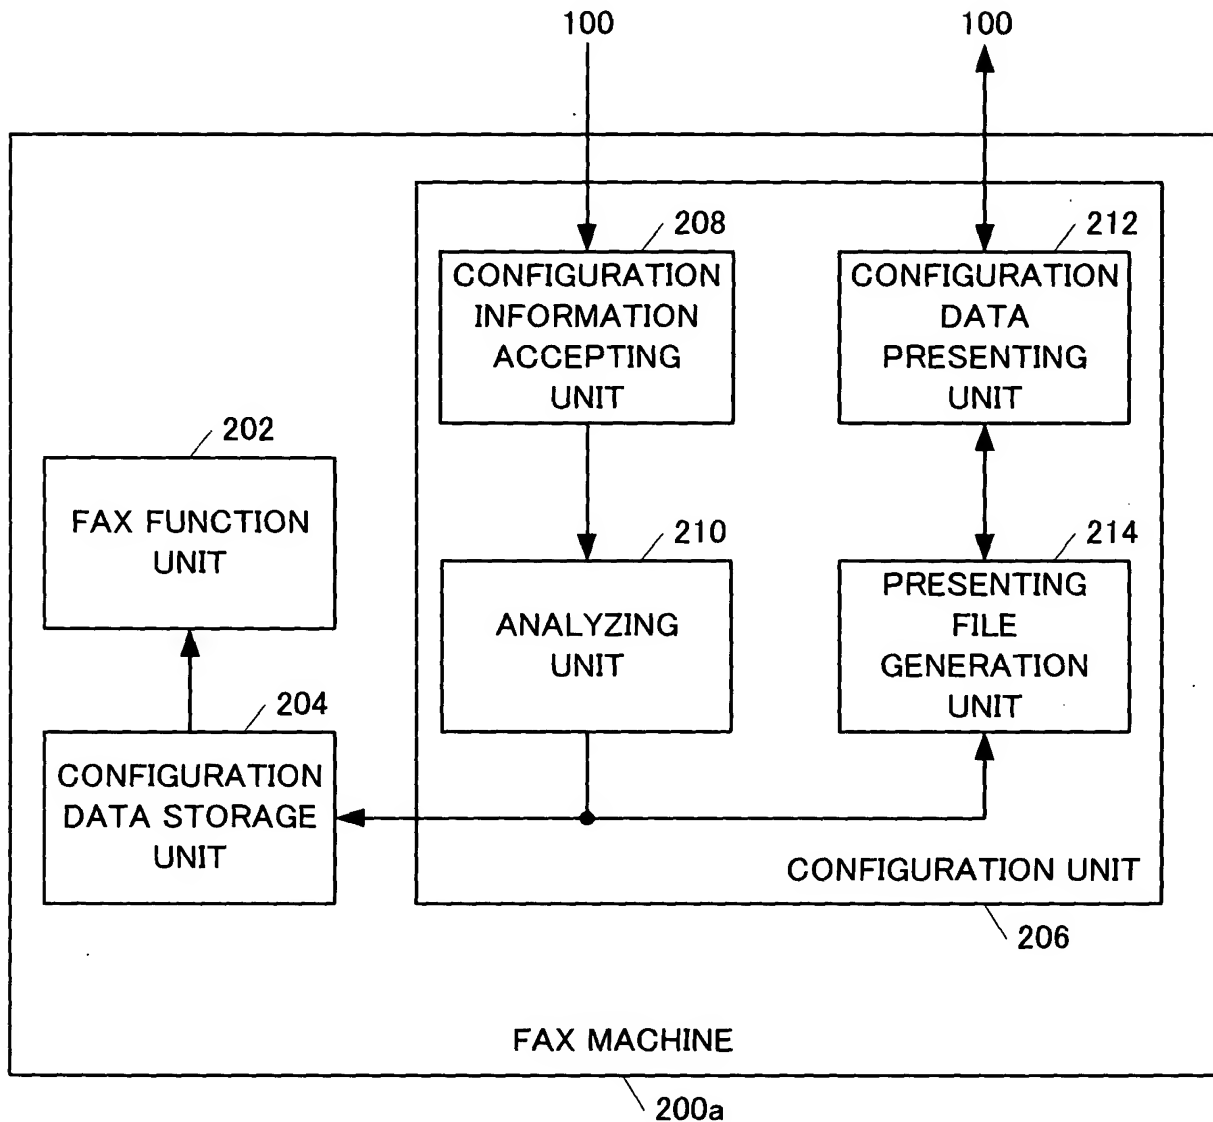


FIG. 5

